



VoiceGear/Trixbox CE Integration Guide Ver. 0.2

Last Updated: May 27, 2009

1. OVERVIEW	3
1.1 SETTING UP TRIKBOX CE PBX	4
1.2 SETTING UP VOICEGEAR GATEWAY	5
2. VOICEGEAR-TRIKBOX CE SIP INTEGRATION.....	6
2.1 TRIKBOX CE CONFIGURATION	7
2.2 VOICEGEAR GATEWAY CONFIGURATION	11

1. Overview

This document presents a complete guide for integrating VoiceGear Skype gateways with Trixbox CE phone systems running version 2.6.x of Trixbox CE distribution software with Asterisk 1.4.x. The document assumes reader familiarity with both VoiceGear and Trixbox CE. For more details on VoiceGear configuration, please refer to the VoiceGear user guide available on www.industrydynamics.ca.

1.1 Setting up Trixbox CE PBX

To get started with your Trixbox CE PBX please follow steps outlined below.

1. Make sure the system running Trixbox CE software has an assigned static IP or a DHCP assigned IP that does not expire, the system is connected to the same LAN as VoiceGear gateway, and there is no firewall between the two systems
2. Switch Trixbox CE to Admin mode and login with administrator credentials
3. Set up a new SIP trunk and an outbound call route to enable the Trixbox CE system to talk to VoiceGear gateway. For more information, please refer to section 2.1

1.2 Setting up VoiceGear Gateway

To get started with VoiceGear, please follow steps outlined below.


1. Connect the supplied power brick/cord and network cable to your new VoiceGear gateway
2. Connect monitor and keyboard to the gateway and use username: root, password: vgcroot123 credentials to access the administration console. Using the console, configure networking settings and set a static IP for the gateway
3. Open the VoiceGear web configuration interface in a web browser using the static IP you have assigned and TCP port 8080. For example, if the static IP assigned is 10.3.1.1, point your browser to <http://10.3.1.1:8080>.
4. Once the web configuration interface has been loaded, please login with the following credentials: **username:** admin, **password:** admin
5. Once logged in, register at least one valid Skype account with the gateway via the “Skype-> Accounts->Add New” page
6. Please refer to section 2.2 for more details on setting up a SIP trunk to enable VoiceGear gateway to communicate with a Trixbox CE PBX

2. VoiceGear-Trixbox CE SIP Integration

The main purpose of this section is to outline both VoiceGear gateway and Trixbox CE configuration to enable integration of both systems via SIP protocol.

2.1 Trixbox CE Configuration

1. Navigate to the “PBX -> PBX Settings” screen via the top menu of the Trixbox CE Web user interface. Then click on “Basic -> Trunks” menu option.
2. Click on “Add SIP Trunk” link to create a new SIP trunk to be used for Skype calls via VoiceGear Skype gateway.

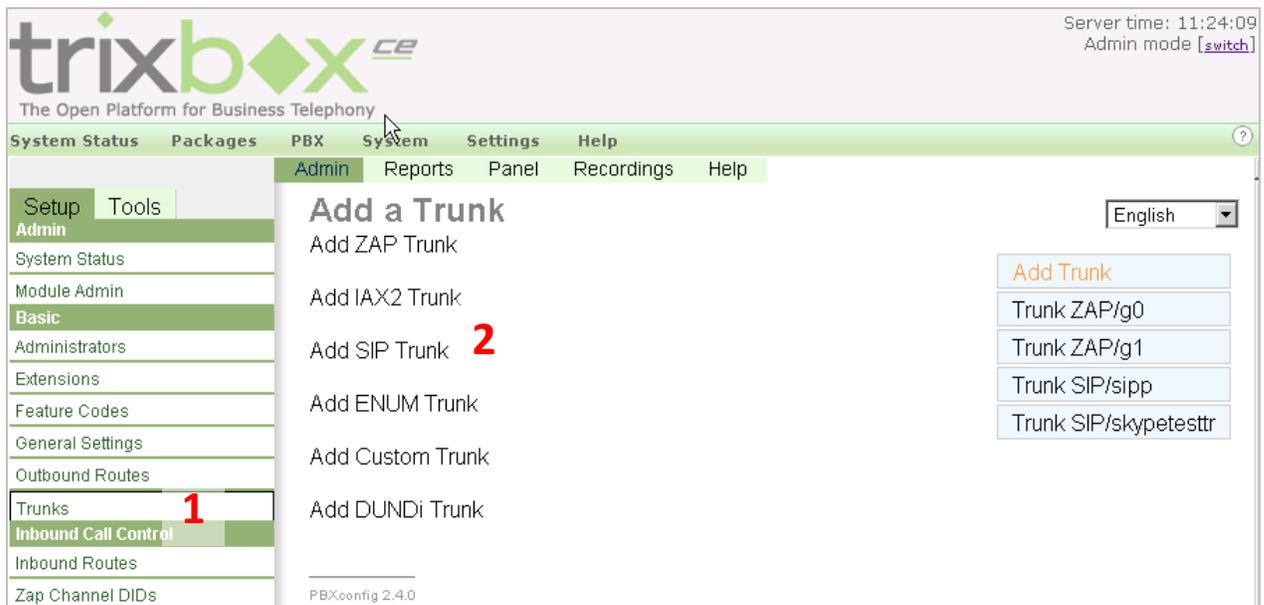

3. In the “Add SIP Trunk” screen, there are 5 main sections: General Settings, Outgoing Dial Rules, Outgoing Settings, Incoming Settings, and Registration.
4. In the “General Settings” section specify the maximum number of outgoing channels (simultaneous calls) to use with this trunk, or leave blank to specify no maximum.

Add SIP Trunk

General Settings

Outbound Caller ID:

Never Override CallerID:

Maximum Channels: **4**

Disable Trunk: Disable

Monitor Trunk Failures: Enable

- There are no changes required in the “Outgoing Dial Rules” section

Outgoing Dial Rules

Dial Rules:

Clean & Remove duplicates

Dial Rules Wizards:

Outbound Dial Prefix:

- Specify “Trunk Name” in the “Outgoing Settings” section
- Type in the following information into the “PEER Details” input box:

Outgoing Settings

Trunk Name: **6**

PEER Details:

```
canreinvite=no
context=from-trunk
dtmfmode=rfc2833
fromuser=asterisk
host=192.168.2.169
insecure=very
secret=asterisk
type=friend
username=asterisk
```

7

Make sure to specify the static IP assigned to your VoiceGear gateway in the “host” property. Make a note of the “username” property specified here; you will need to enter the same user name in the VoiceGear configuration in section 2.2 below.

- Specify “USER Context” in the “Incoming Settings” section as show below:

Incoming Settings

USER Context: **8**

USER Details:

9. Specify “Register String” in the “Registration” section as show below:

Registration

Register String:

9

10

Register string is used to register Trixbox CE system with VoiceGear gateway as a Skype provider. Make sure to specify the register string in the following format: *username:password@voicegear_ip_address*

10. Click “Submit Changes” button. This will create a new trunk that will be used for all Skype calls via VoiceGear gateway.
11. In the main menu on the left side, click on “Basic -> Outbound Routes” menu option to create a new outbound call route to be used for Skype calls via VoiceGear Skype gateway.


Server time: 23:50:18
Admin mode [\[switch\]](#)

System Status Packages PBX System Settings Help

Setup **Tools**

Admin

System Status

Module Admin

Basic

Administrators

Extensions

Feature Codes

General Settings

Outbound Routes **11**

Trunks

Inbound Call Control

Inbound Routes

Zap Channel DIDs

Announcements

Blacklist

Day/Night Control

Follow Me

IVR

Queues

Ring Groups

Time Conditions

Add Route

Route Name:

Route Password:

Emergency Dialing:

Intra Company Route:

Music On Hold?

Dial Patterns

Dial patterns wizards:

Trunk Sequence

English

0 skypeptest

1 9_outside

12. Specify “Route Name” in the “Add Route” screen
13. Specify “Dial Pattern” to be used for selecting the trunk connected to VoiceGear gateway (called “Skype trunk” below). In the example below, the digit 6 is used as a prefix to send outgoing calls via the Skype

trunk. Hence, if you dial 64168481850, the system would recognize the digit 6 as a prefix for Skype trunk, and will place the call to 4168481850 via Skype.

14. Select a predefined Skype trunk for the “Trunk Sequence” (you created a new SIP trunk for Skype in steps 1-10 above). This trunk will be used to place the call when the above Dial Pattern is matched.

Add Route

Route Name: **12**

Route Password:

Emergency Dialing:

Intra Company Route:

Music On Hold?: ▼

Dial Patterns

6 | .

13

Dial patterns wizards: ▼

Trunk Sequence

▼ **14**

15

15. Click “Submit Changes” button. This will create a new outgoing call route that will be used for outgoing Skype calls via VoiceGear gateway.

2.2 VoiceGear Gateway Configuration

1. Navigate to the “Channels->SIP” screen via the main menu of the VoiceGear web configuration interface

Web Site | Online Support | License | Check for updates | Buy Skype Credit

VoiceGear  Disconnect admin

System

- Settings
- Users and Groups
- Skype™
- Address Book
- Channels**
- SIP **1**
- Analog/Digital
- Diva

Call Routes

Call Filters

Dashboard

SIP Channel Configuration

Use this screen to view and configure general SIP settings.

Use "SIP Trunks" button to manage SIP trunk configuration.
Please note: SIP settings below should only be modified by a system administrator. Wrong settings may prevent the system from properly connecting to the PBX. Please refer to the user guide for more information.

Basic SIP Settings

Present as IP	<input type="text" value="auto"/>	2
Listening Port	<input type="text" value="5060"/>	
Exposed Realm	<input type="text" value="vgc"/>	
Agent Name	<input type="text" value="VGConnect"/>	

Advanced SIP Settings

3

VoiceGear Connect 3.0 :: © IndustryDynamics 2006-2009

2. Make sure “listening port” is set to 5060
3. Click on the “SIP trunks” button to start the configuration of a SIP trunk that will communicate with Trixbox CE PBX
4. Under the SIP trunks page that opens, click on the “Add new” button to start adding a new trunk

Web Site | Online Support | License | Check for updates | Buy Skype Credit

VoiceGear  

SIP Channel: New Channel

Use this screen to configure SIP trunk settings.
Please consult your PBX administrator or manufacturer for detailed configuration parameters.

Basic Settings

Description	<input type="text" value="Trixbox"/>	5
Authentication Mode	<input type="text" value="Username and Password"/>	6
Link Mode	<input type="text" value="PBX"/>	7
Username	<input type="text" value="asterisk"/>	8
Password	<input type="password" value="*****"/>	9
Auth Username	<input type="text" value="asterisk"/>	10
Remote Side IP	<input type="text"/>	
Remote Side Port	<input type="text"/>	
DTMF Mode	<input type="text" value="RFC2833"/>	
Connection Enabled	<input type="text" value="Yes"/>	

Advanced Settings

VoiceGear Connect 3.0 :: © IndustryDynamics 2006-2009

- Under “Basic settings”, set the “Description” to ‘Trixbox’ to help future identification of this SIP trunk
- Select the “Authentication mode” to be “Username and Password”
- Select the link mode to be “PBX”, this will tell VoiceGear gateway that it is communicating with a PBX as opposed to an individual user
- Set the “Username” to be ‘asterisk’. Please note that this must match the “username” property set in step 7 above (in the Trixbox trunk configuration section)
- Set the “Password” to be ‘asterisk’. Please note that this must match the “secret” property set in step 7 above (in the Trixbox trunk configuration section)
- Set the “Auth Username” to ‘asterisk’. Please note that this must match the “fromuser” property set in step 7 above (in the Trixbox trunk configuration section)

- Click on the “Save” button to save your changes. Once clicked, an “Apply settings” dialog will come up. Please click on “Apply now” button to apply your settings

The screenshot displays the VoiceGear web configuration interface. At the top, there are navigation links: Web Site | Online Support | License | Check for updates | Buy Skype Credit. The VoiceGear logo is on the left, and a 'Disconnect admin' button is on the right. A left sidebar contains a menu with items: System, Settings, Users and Groups, Skype™, Address Book, Channels, SIP, Analog/Digital, Diva, Call Routes, Call Filters, and Dashboard. The main content area features a blue notification banner: 'Modifications need to be applied, please click on the "Apply Now" button.' Below this is a yellow banner: 'SIP Channel: New Channel' with a red '11' and a note: 'Use this screen to configure SIP trunk settings. Please consult your PBX administrator or manufacturer for detailed configuration parameters.' A green banner below that says 'Successfully saved'. The 'Basic Settings' section is expanded, showing fields for Description (Trixbox), Authentication Mode (Username and Password), Link Mode (PBX), Username (asterisk), Password (masked with dots), Auth Username (asterisk), Remote Side IP, Remote Side Port, DTMF Mode (RFC2833), and Connection Enabled (Yes). An 'Advanced Settings' section is partially visible at the bottom.

- Navigate to the “Call Routes -> Inbound Routes” screen via the main menu of the VoiceGear web configuration interface and click on “Incoming calls any/any” route
- In the second part of the screen (under “2. Route Them to the First Available Destination in the Following List”), remove the default destination by clicking on the red “X” button to the right of it.
- Add a new destination by selecting a SIP PBX trunk identified as “SIP PBX asterisk” from the “Select Destination Trunk” drop-down box, then type your extension off the Trixbox system into “Use this Number as Destination” text field. For example, if your office extension is “110”, then type in ‘110’ into this field. You can also specify ‘s’ as asterisk default extension, in which case your Trixbox will send the call to the default route, like your IVR or auto-attendant.
- Click “Add” followed by “Save” to apply your changes
- To try a test call from any extension connected to the Trixbox CE PBX, please dial “6123”. This will route you to the Skype call testing service
- If Skype account registered with the gateway has SkypeOut credits, you can try dialing a landline though Skype by entering “64168481850” from any extension. This will dial into IndustryDynamics head office.